

Part Number: K34110EU | EAN Code: 5028252638555

Enhanced productivity today and in the future.

If you need a high-speed dock that easily supports Dual 4K connections to HDMI monitors, powers as many devices as possible and reduces the number of adapters, cables and wired devices on your desktop, the SD5760T Thunderbolt 4 Dual 4K Docking Station is the ideal dock for you.

Perfect for busy professionals working in the home or office, this dock supports the latest MacBooks, Surface devices, and other Thunderbolt 4 enabled laptops with everything you need to enhance your productivity today and well into the future.

Providing a true plug-and-play experience, flexible video port options, 40Gbps data transfer speeds, dynamic Power Delivery and daisy chaining via Thunderbolt 4, the SD5760T offers everything you need in a docking station.

#### Features include:


- Supports Thunderbolt 4, Thunderbolt 3, USB4, and USB-C devices
- Transfers up to 40Gbps of data, video and audio
- Supports up to Single 8K @ 60Hz via a Thunderbolt 4 port when DSC is enabled or Dual 4K @ 60Hz via two HDMI ports.
- Supports up to 96W of Power Delivery and automatically adjusts for optimal performance
- 13-in-1 design includes
   Thunderbolt, USB-C, USB-A, HDMI,
   Ethernet, a combo
   audio jack, and micro and SD card
   readers

# Kensington


### SD5760T Thunderbolt™ 4 Dual 4K Docking Station

Part Number: K34110EU | EAN Code: 5028252638555

Front

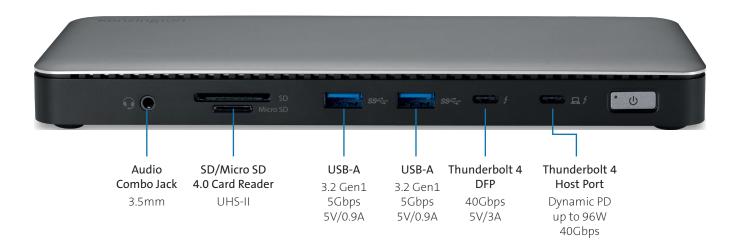

Back

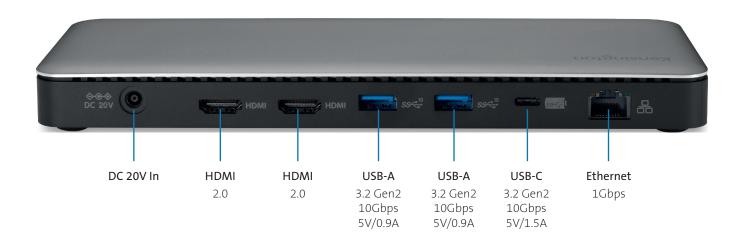

# Kensington

### SD5760T Thunderbolt™ 4 Dual 4K Docking Station

Part Number: K34110EU | EAN Code: 5028252638555



#### **Universal Compatibility**

Offers a quick and powerful plug-and-play solution for Thunderbolt 4, Thunderbolt 3, USB4 and USB-C devices running Windows (10 or later) or macOS (11 or later)



#### Thunderbolt™ 4 Technology

Transfer up to 40Gbps of data, video and audio (10Gbps for USB-C Gen2 laptops, 5Gbps for USB-C Gen1 laptops) through the included 0.8m (2.6') Thunderbolt 4 cable. Provides daisy chain support for SSDs, monitors and other Thunderbolt devices. Blocks peripheral devices from unauthorised access to your system memory using Intel VT-d DMA protection.



### Single 8K or Dual 4K Support for Thunderbolt Devices

Extend visual productivity with the resolution, contrast and colour depth of Ultra HD. Supports up to Single 8K @ 60Hz via a Thunderbolt 4 port when DSC is enabled or Dual 4K @ 60Hz via 2 x HDMI ports.



#### Up to 96W Dynamic Power Delivery

Delivers power whenever and wherever you need it - to host and connected accessories. Supports up to 96W of Power Delivery and provides optimal performance under any usage scenario.



#### Productive 13-in-1 Design

Extend your productivity with 2 x HDMl ports, 1 x Thunderbolt 4 port, 1 x Thunderbolt 4 host port, 1 x USB-C 3.2 Gen2 10Gbps port, 2 x USB-A 3.2 Gen2 10Gbps ports, 2 x USB-A 3.2 Gen1 5Gbps ports, 1 x Gigabit Ethernet port, 1 x audio combo jack and UHS-II 4.0 SD/Micro SD card readers.



### Zero-Footprint Mounting and Security Cable Lock Slots

Maximise desktop space and reduce cable clutter by mounting your docking station out of the way. Mounting bracket sold separately (K34050WW). Standard and Nano lock slots allow you to protect your investment with a Kensington cable lock (K65020EU or K65021WW), sold separately.



Part Number: K34110EU | EAN Code: 5028252638555

| C. |         | D    | :      | L _   |
|----|---------|------|--------|-------|
| >1 | /STem   | REC  | uirem  | ents  |
| _  | yotciii | 1100 | un Cin | CIICS |

|                     | Systems Supported               | Supports Thunderbolt 4 / Thunderbolt 3 / USB4 an USB-C 3.2 devices  |
|---------------------|---------------------------------|---|
|                     | Operating Systems Supported     | Windows® 10 or above<br>macOS 11 or above   |
|                     | Plug & Play                     | Yes   |
|                     | Software                        | For Windows, need to enable<br>Intel Thunderbolt™ software  |
|                     | System Resource Requirement     | CPU: Intel® Core™ i5 6th generation or above<br>Memory: 8Gb or above<br>GPU: Intel® HD Graphics 620 or above  |
|                     | Additional Software Information | DockWorks compatible  |
|                     | USB-C Power Delivery            | PD3.0: 5V, 9V, 15V/3A & 20V/4.8A<br>(up to 96W Dynamic Power)   |
| Docking Station     |                                 |   |
|                     | Technology                      | Intel® JHL8440 Thunderbolt 4 controller   |
| USB Interface       |                                 |   |
|                     | Type of USB Connector           | Thunderbolt 4 / USB-C Connector   |
|                     | Host Connector                  | Supports Thunderbolt 4 / Thunderbolt 3 / USB4 / USB-C with full function  |
| USB Connections     |                                 |   |
|                     | Ports                           | Front Panel: -1 x Thunderbolt 4 Host Port (up to Dynamic PD 96W, 40Gbps) -1 x Thunderbolt 4 DFP (up to PD 5V/3A, 40Gbps) -2 x USB-A 3.2 Gen1 5Gbps (5V/0.9A) -1 x SD/Micro SD 4.0 Card reader (UHS-II) -1 x 3.5mm Audio combo Back Panel: -1 x USB-C 3.2 Gen2 10Gbps (5V/1.5A) -2 x USB-A 3.2 Gen2 10Gbps (5V/0.9A) -2 x HDMI 2.0 -1 x 1Gbps Ethernet |
| Network Connections |                                 |   |
|                     | Ethernet Port                   | RJ45  |
|                     | Compatible Ethernet Speeds      | 10/100/1000 Mbps  |
| Host Connectivity   |                                 |   |
|                     | Host Docking Connector          | Thunderbolt 4 upstream port PD up to 96W,<br>Dynamic Power  |
|                     |                                 |   |



Part Number: K34110EU | EAN Code: 5028252638555

#### Video Connections


Video Connectors

1 x Thunderbolt 4
2 x HDMI 2.0

Maximum Resolution Supported

Please refer to table below

|  | * <b>-</b> 5 | HDMI      | ньмі Ф ньмі |
|--|--------------|-----------|-------------|
| Thunderbolt™ 3 /<br>Thunderbolt™ 4 /<br>USB4 (Windows) | 8K @ 60Hz*   | 4K @ 60Hz | 4K @ 60Hz   |
| Thunderbolt™ 3 /<br>Thunderbolt™ 4 /<br>(macOS)        | 6K @ 60Hz    | 4K @ 60Hz | 4K @ 60Hz   |
| USB-C Alt Mode (Windows)                               | 4K @ 60Hz    | 4K @ 60Hz |             |
| MacBook M1/M2 / iPad Pro                               | 6K @ 60Hz    | 4K @ 60Hz |             |

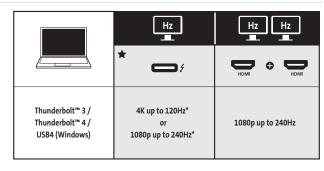

<sup>\*</sup> Support for Display Stream Compression (DSC) is based on the host device and monitor capabilities.



#### **Audio Connections**

|                         | Audio Connectors                    | 1 x 3.5mm audio combo jack                                  |
|-------------------------|-------------------------------------|---|
| LED Indicator           |                                     |   |
|                         | Blue LED                            | Power indicator   |
| Material Specifications |                                     |   |
|                         | Exterior                            | Enclosure: Aluminium / PC + ABS                             |
|                         | Bottom                              | PC + ABS  |
|                         | Product Colour                      | Deep Space Grey / PMS Black                                 |
| Other Features          |                                     |   |
|                         | Kensington Security Slot            | Kensington Security Slot<br>Kensington Nano Security Slot   |
|                         | VESA Mount Compatible               | Yes, with K34050WW  |
| Product Dimensions      |                                     |   |
|                         | Cable Dimensions                    | 0.8m (31.5")  |
|                         | Unit Weight                         | 0.36kg (0.79lbs)  |
|                         | Unit Dimensions without Peripherals | 225 x 85 x 22mm (8.86 x 3.34 x 0.87")                       |
|                         | Enclosure Colour & Material         | Black PMS, PC+ABS with texture<br>Deep Space Grey Aluminium |
|                         | Desktop Footprint                   | 191.25cm² (27.92in²)  |
|                         |                                     |   |



Part Number: K34110EU | EAN Code: 5028252638555

| $D \sim c$ | 12001 | nal)   | IMANG | IODC   |
|------------|-------|--------|-------|--------|
| гац        | หลยเ  | וו אוו | imens | כווטוו |
|            |       |        |       |        |

|                       | Packaging Style             | Retail Package  |  |
|-----------------------|-----------------------------|---|--|
|                       | Packaging Dimensions        | 242 x 108 x 100mm (9.53 x 4.25 x 3.94")<br>1.19kg (2.62lbs)   |  |
|                       | Packaging Weight            |   |  |
|                       | Packaging Content           | 1 x SD5760T Dock 1 x Thunderbolt 4 passive cable (0.8m) 1 x Power Supply Unit (135W) 1 x Instruction Guide 1 x Warranty Card 1 x Compliance Sheet 1 x Welcome card insert |  |
|                       | Master Carton               | 6pcs  |  |
| Power and Environm    | ental                       |   |  |
|                       | Power Adapter Rating        | Input: 100-240V, AC 50/60Hz, 2A<br>Output: 21V DC 6.4A (134.4W)   |  |
|                       | Relative Humidity           | 55% operating temperature @ 25°C (77°F)   |  |
|                       | Operating Temperature       | 0 to 45°C (32 to 113°F)   |  |
|                       | Storage Temperature         | 0 to 60°C (32 to 140°F)   |  |
| Country of Origin, Re | gulatory and Warranty       |   |  |
|                       | Country of Origin           | China   |  |
|                       | Certifications & Compliance | FCC, IC, CE, RCM, VCCI, UKCA, CB, RoHS, ACCO RSL  |  |
|                       | Warranty                    | 3-Year Limited - worldwide  |  |



