

SD5200T Thunderbolt 3 Docking Station

Part number: K38300EU

UPC code: 5889638300



At last, the cross-platform compatible dock with Thunderbolt 3 connectivity has arrived. Engineered to support mixed Windows and Mac computing environments with high transfer speed requirements. The Thunderbolt 3 Docking Station is an innovative device providing up to 40Gbps data transfer and 85W power delivery on a single connection with 5K or dual 4K monitors and robust daisy-chaining options.

FEATURES AND BENEFITS

- Cross-Platform Compatibility allows this Thunderbolt 3 dock to work for both Windows and Mac users
- Thunderbolt 3 Technology allows a single port to provide up to 40Gbps of data speed, and connectivity to Thunderbolt-enabled devices, billions of USB devices, and UHD displays – all while supplying power
- 5K or 4K for Dual Monitors supports the resolution, contrast and colour depth of Ultra HD via DisplayPort or HDMI (adapters sold separately)
- Expand connectivity via a USB-C 5Gbps port with 85W power delivery, two USB 3.0 ports (one of which is a 2.1A charging port), one DisplayPort++, one Gigabit Ethernet port, and 3.5mm headphone and microphone jacks
- Daisy Chaining allows connection for up to 5 additional Thunderbolt-enabled devices
- Kensington Security Slot protects your technology investment via easy implementation of a cable lock
- Zero Footprint Mounting provides the option to attach the dock to the back of any VESA compatible external display to accommodate space-challenged workspaces (mounting plate (K33959WW) sold separately)

All specifications are subject to change without notice. Please check with your supplier for exact offers.
Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

TECHNICAL SPECIFICATIONS

SYSTEM REQUIREMENT

- **Operating systems supported:**
Windows 10 and macOS 10.12 or later
- **Plug & Play:**
Yes for Thunderbolt 3 host computers
- **System resource requirement:** N/A
- **USB-C power delivery:**
5V/9V/15V up to 3A, 20V up to 4.25A

HOST CONNECTIVITY

- **Host docking connector:** Thunderbolt 3 with Power Delivery up to 85W. Look for the Thunderbolt 3 icon on PC's USB-C ports



VIDEO CONNECTIONS

- **Video connectors:**
 - DisplayPort v1.2++, supports passive adapters for HDMI and DVI
 - The Thunderbolt 3 ports can be converted into video ports with either K33993WW (USB-C to HDMI) or K33994WW (USB-C to VGA)
- **Maximum resolution supported:**
 - Single Monitor: 4096 x 2160 @ 60Hz
 - Dual Monitors: 4096 x 2160 @ 60Hz
- **HDCP support:** No

AUDIO CONNECTIONS

- **Audio connectors:**
 - 3.5mm audio for headphone/speaker
 - 3.5mm audio for microphone
- **Audio channels supported:** Stereo LR

USB CONNECTIONS

- **USB 3.0 ports:** 2; (1) front which is a 2.1A charging port & (1) back, speeds up to 5Gbps
- **USB-C Ports:** (1) front; does not support USB-C Alt mode. Supports USB bus power up to 15W

NETWORK CONNECTIONS

- **Ethernet port:** RJ45
- **Compatible ethernet speeds:** 10/100/1000 Mbps

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

OTHER FEATURES

- **Kensington Security Slot**
- **VESA mount compatible:**
Mounting plate (K33959WW) sold separately

PRODUCT DIMENSIONS

- **Unit dimensions:**
 - Width: 217.4mm (8.6in)
 - Depth: 85.3mm (3.4in)
 - Height: 25.7mm (1.0in)
- **Desktop footprint:** 185 cm² (29 in²);
n/a if mounted behind VESA compatible monitor
- **Unit weight:** 337g (11.9 oz)
- **Enclosure colour and material:**
Brushed aluminium and black ABS

PACKAGING DIMENSIONS

- **Packaging style:** White box (K38300EU);
Retail box (K38300NA/K38300AU)
- **Unit box:**
 - Width: 254mm (10.0in)
 - Depth: 140mm (5.5in)
 - Height: 89mm (3.5in)
- **Packaging weight:** 0.95kg (2.1lbs)
- **Master carton:** 4 pcs
 - Width: 368mm (14.5in)
 - Depth: 152mm (6.0in)
 - Height: 267mm (10.5in)
 - Weight: 4.35kg (9.6lbs)
- **Package content:**
 - One SD5200T Thunderbolt Docking Station
 - One Thunderbolt 3 Cable, 0.5M (1.5ft)
 - One AC Power Adapter with US power cable included (K38300NA); One AC Power Adapter with EU and UK power cables included (K38300EU); One AC Power Adapter with AU power cable included (K38300AU)
 - One Instruction Guide
 - Warranty Information

POWER AND ENVIRONMENTAL


- **Power adapter rating:**
 - Input: 100-240V; 2.5A Max
 - Output: 20V DC; 8.5A, center-pin positive polarity
- **Operating temperature:** 0 to 40° C (32 to 140° F)
- **Storage temperature:** -40 to 70° C (-40 to 158° F)
- **Relative humidity:** 5% to 95% non-condensing

COUNTRY OF ORIGIN, REGULATORY, AND WARRANTY


- **Country of origin:** China
- **Certifications and compliance:** CE, FCC, RCM, ERP, REACH, RoHS, Thunderbolt certification
- **Warranty:** 3-years limited - worldwide

All specifications are subject to change without notice. Please check with your supplier for exact offers.
Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

FRONT

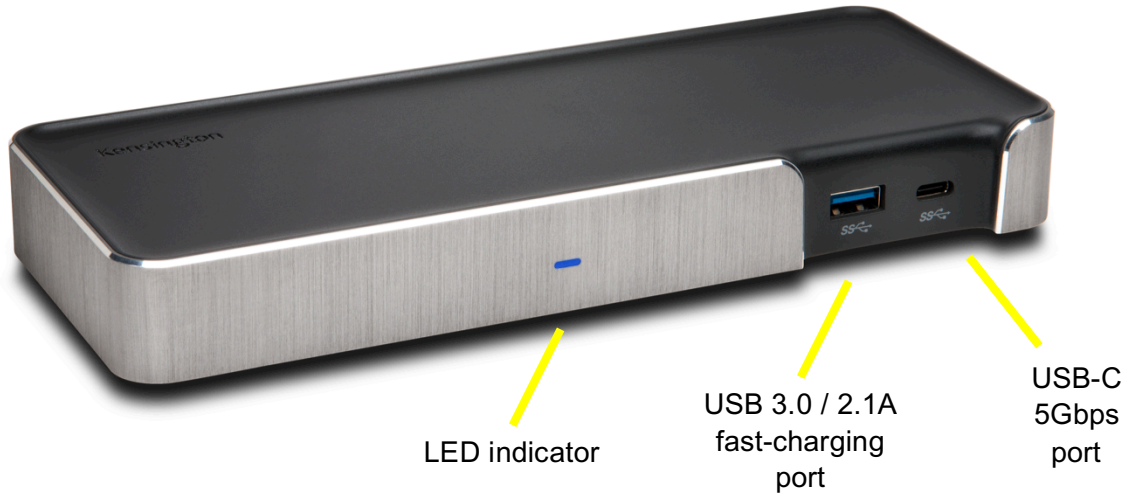

BACK

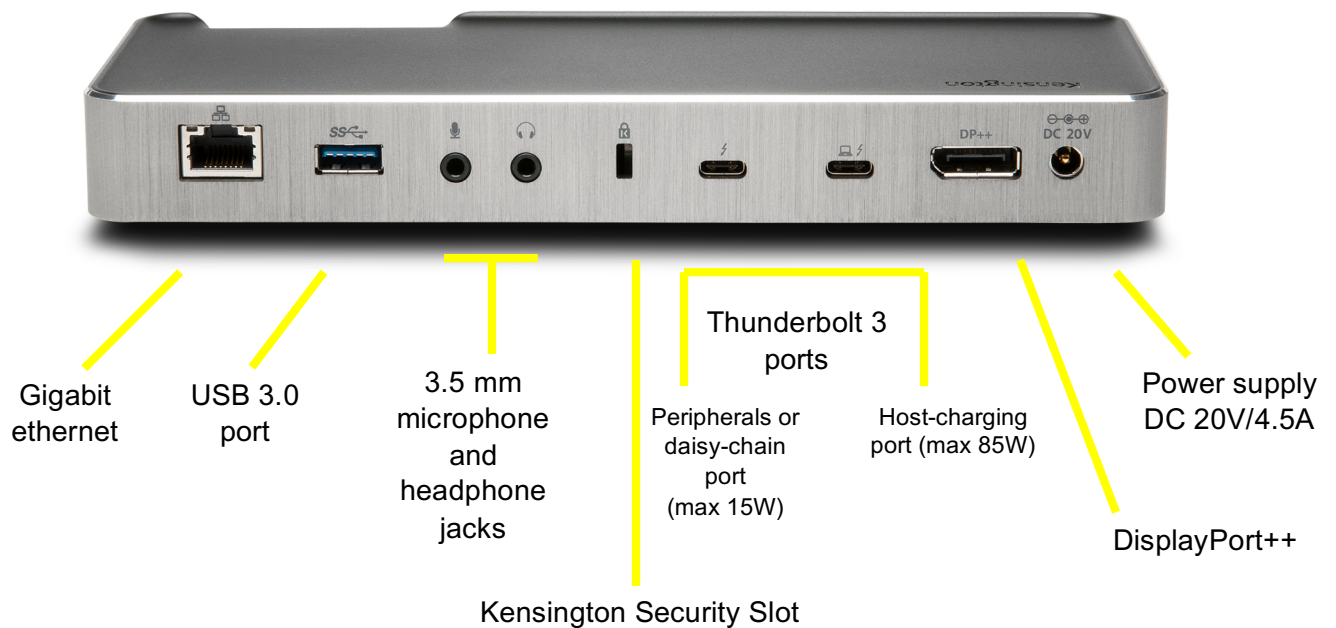

All specifications are subject to change without notice. Please check with your supplier for exact offers.
Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.