

SD5760T Thunderbolt™ 4 Dual 4K Docking Station

Part Number: K34110NA | UPC Code: 0 85896 34110 9

Enhanced productivity today and in the future.

If you need an affordable high-speed dock that easily supports Dual 4K connections to HDMI monitors, powers as many devices as possible, and reduces the number of adapters, cables, and wired devices on your desktop, the SD5760T Thunderbolt™ 4 Dual 4K Docking Station is the ideal dock for you.

Perfect for busy professionals working in the office or at home, this dock supports the latest MacBooks, Surface devices, and other Thunderbolt™ 4 enabled laptops with everything you need to enhance your productivity today and well into the future.

Providing a true plug-and-play experience, flexible video port options, 40Gbps data transfer speeds, dynamic Power Delivery, and daisy chaining via Thunderbolt 4, the SD5760T offers everything you need in a docking station.


Features include:

- Supports Thunderbolt™ 4, Thunderbolt™ 3, USB4, and USB-C devices
- Transfers up to 40Gbps of data, video, and audio
- Supports up to Single 8K @ 60Hz via a Thunderbolt 4 port when DSC is enabled or Dual 4K @ 60Hz via two HDMI ports.
- Supports up to 96W of Power Delivery and automatically adjusts for optimal performance
- 13-in-1 design includes
 Thunderbolt, USB-C, USB-A,
 HDMI, Ethernet, a combo
 audio jack, and micro and SD
 card readers

SD5760T Thunderbolt™ 4 Dual 4K Docking Station

Part Number: K34110NA | UPC Code: 0 85896 34110 9

Front

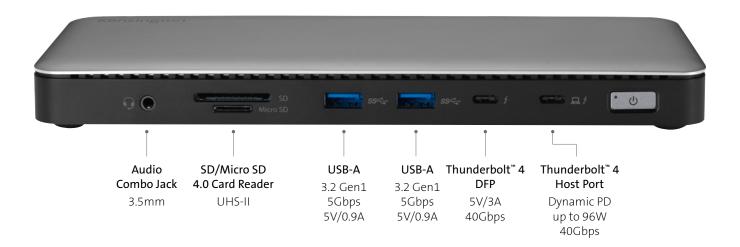

Back



SD5760T Thunderbolt™ 4 Dual 4K Docking Station

Part Number: K34110NA | UPC Code: 0 85896 34110 9



Universal Compatibility

Offers a quick and powerful plugand-play solution for Thunderbolt™ 4, Thunderbolt™ 3, USB4, and USB-C devices running Windows (10 or later) or macOS (11 or later)



Thunderbolt™ 4 Technology

Transfer up to 40Gbps of data, video, and audio (10Gbps for USB-C Gen2 laptops, 5Gbps for USB-C Gen1 laptops) — all through the included 2.6′ (0.8m) Thunderbolt™ 4 cable. Provides daisy chain support for SSDs, monitors, and other Thunderbolt™ devices. Blocks peripheral devices from unauthorized access to your system memory using Intel VT-d DMA protection.



Single 8K or Dual 4K Support for Thunderbolt Devices

Extend visual productivity with the resolution, contrast, and color depth of Ultra HD. Supports up to Single 8K @ 60Hz via a Thunderbolt™ 4 port when DSC is enabled or Dual 4K @ 60Hz via two HDMI ports.



Up to 96W Dynamic Power Delivery

Delivers power whenever and wherever you need it —to host and connected accessories. Supports up to 96W of Power Delivery and provides optimal performance under any usage scenario.



Productive 13-in-1 Design

Extend your productivity with two HDMI ports, one Thunderbolt™ 4 port, one Thunderbolt™ 4 host port, one USB-C 3.2 Gen2 10Gbps port, two USB-A 3.2 Gen2 10Gbps ports, two USB-A 3.2 Gen1 5Gbps ports, one Gigabit Ethernet port, one audio combo jack, and two UHS-II 4.0 SD and Micro SD card readers.



Zero-Footprint Mounting and Security Cable Lock Slots

Maximize desktop space and reduce cable clutter by mounting your docking station out of the way. Mounting bracket sold separately (K34050WW). Standard and Nano lock slots allow you to protect your investment with a Kensington cable lock (K65020WW or K65021WW), sold separately.

SD5760T Thunderbolt™ 4 Dual 4K Docking Station

Part Number: K34110NA | UPC Code: 0 85896 34110 9

_				
C 1 /	ctom	$\nu \sim \sigma$	LILLICO	ments
> V	SICIL	$K \vdash U$		
~ ,	200111		01110	

	Systems Supported	Supports Thunderbolt™ 4 / Thunderbolt™ 3 / USB4 / USB-C 3.2 devices
	Operating Systems Supported	Windows® 10 or above macOS 11 or above
	Plug & Play	Yes
	Software	For Windows, need to enable Intel Thunderbolt™ software
	System Resource Requirement	CPU: Intel® Core™ i5 6th generation or above Memory: 8Gb or above GPU: Intel® HD Graphics 620 or above
	Additional Software Information	DockWorks compatible
	USB-C Power Delivery	PD3.0: 5V, 9V, 15V/3A & 20V/4.8A (up to 96W Dynamic Power)
Docking Station		
	Technology	Intel® JHL8440 Thunderbolt™ 4 controller
USB Interface		
	Type of USB Connector	Thunderbolt™ 4 / USB-C Connector
	Host Connector	Supports Thunderbolt™ 4 / Thunderbolt™ 3 / USB4 / USB-C with full function
USB Connections		
	Ports	Front Panel: -1 x Thunderbolt™ 4 Host Port (up to Dynamic PD 96W, 40Gbps) -1 x Thunderbolt™ 4 DFP (up to PD 5V/3A, 40Gbps) -2 x USB-A 3.2 Gen1 5Gbps (5V/0.9A) -1 x SD/Micro SD 4.0 Card reader (UHS-II) -1 x 3.5mm Audio combo Back Panel: -1 x USB-C 3.2 Gen2 10Gbps (5V/1.5A) -2 x USB-A 3.2 Gen2 10Gbps (5V/0.9A) -2 x HDMI 2.0 -1 x 1Gbps Ethernet
Network Connections		
	Ethernet Port	RJ45
	Compatible Ethernet Speeds	10/100/1000 Mbps
Host Connectivity		
	Host Docking Connector	Thunderbolt™ 4 upstream port PD up to 96W, Dynamic Power


SD5760T Thunderbolt™ 4 Dual 4K Docking Station

Part Number: K34110NA | UPC Code: 0 85896 34110 9

Video Connections

Video Connectors	1 x Thunderbolt™ 4 2 x HDMI 2.0
Maximum Resolution Supported	Please refer to table below

			<u> </u>
	*	ндмі	HDMI + HDMI
Thunderbolt™ 3 / Thunderbolt™ 4 / USB4 (Windows)	8K @ 60Hz*	4K @ 60Hz	4K @ 60Hz
Thunderbolt™ 3 / Thunderbolt™ 4 / (macOS)	6K @ 60Hz	4K @ 60Hz	4K @ 60Hz
USB-C Alt Mode (Windows)	4K @ 60Hz	4K @ 60Hz	
MacBook M1/M2 / iPad Pro	6K @ 60Hz	4K @ 60Hz	



^{*} Support for Display Stream Compression (DSC) is based on the host device and monitor capabilities.



Audio Connections

	Audio Connectors	1 x 3.5mm audio combo jack
LED Indicator		
	Blue LED	Power indicator
Material Specifications		
	Exterior	Enclosure: Aluminum / PC + ABS
	Bottom	PC + ABS
	Product Color	Deep Space Gray / PMS Black
Other Features		
	Kensington Security Slot	Kensington Security Slot Kensington Nano Security Slot
	VESA Mount Compatible	Yes, with K34050WW
Product Dimensions		
	Cable Dimensions	31.5in (0.8m)
	Unit Weight	0.79lbs (0.36kg)
	Unit Dimensions without Peripherals	8.86 x 3.34 x 0.87in (225 x 85 x 22mm)
	Enclosure Color & Material	Black PMS, PC+ABS with texture Deep Space Grey Aluminum
	Desktop Footprint	27.92in² (191.25cm²)

SD5760T Thunderbolt™ 4 Dual 4K Docking Station

Part Number: K34110NA | UPC Code: 0 85896 34110 9

		Г.	
レコト	kaσιn	σ 1) m	ensions
Iac	Nagini	guiiii	CHOICHS

	Packaging Style	Retail Package (K34110NA)
	Packaging Dimensions	9.53 x 4.25 x 3.94in (242 x 108 x 100mm)
	Packaging Weight	2.62lbs (1.19kg)
	Packaging Content	1 x SD5760T Dock 1 x Thunderbolt™ 4 passive cable (0.8m) 1 x Power Supply Unit (135W) 1 x Instruction Guide 1 x Warranty Card 1 x Compliance Sheet 1 x Welcome card insert
	Master Carton	6
Power and Environ	mental	
	Power Adapter Rating	Input: 100-240V; AC 50/60Hz; 2A Output: 21V DC 6.4A (134.4W)
	Relative Humidity	55% operating temperature @ 77°F (25°C)
	Operating Temperature	32 to 113°F (0 to 45°C)
	Storage Temperature	32 to 140°F (0 to 60°C)
Country of Origin, F	Regulatory, and Warranty	
	Country of Origin	Vietnam: NA China: EU/AP/CN/JP
	Certifications & Compliance	FCC, IC, CE, RCM, VCCI, UKCA, CB, RoHS, ACCO RSL
	Warranty	3-Year Limited - worldwide

