

SD3650 USB 3.0 Universal Docking Station

Part Number: K33997WW

UPC Code: 085896 33997 7




Preserve the convenience of one-cable connectivity to your entire desktop setup with the SD3650 Universal USB 3.0 Docking Station. What makes the SD3650 unique from the SD3600 is that you can connect dual HD video monitors using DisplayPort and HDMI ports, plus we increased the USB 3.0 accessory expansion ports to four, ideal for a flash drive so it can transfer data at 5Gbps. The dock also features Zero Footprint Mounting, so it can be mounted to the back of a VESA-compatible monitor using a Docking Station Mount (sold separately), perfect for desks with limited space.


FEATURES	BENEFITS
<ul style="list-style-type: none">• Dual HD Video Output• Zero Footprint Mounting• Extend or Mirror Modes• Four USB 3.0 Ports• Fast-Charging USB Port• Two Rear USB 2.0 Ports• Display Setting Software• Gigabit Ethernet Port	<ul style="list-style-type: none">• Single Cable Connectivity<ul style="list-style-type: none">○ One cable connection from laptop to all peripherals on user's desk• Maximize Workspace Desk<ul style="list-style-type: none">○ Reduce desktop cable clutter by mounting the dock behind a VESA compatible monitor• More Display Productivity<ul style="list-style-type: none">○ Add up to two external monitors to increase work productivity

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

FRONT

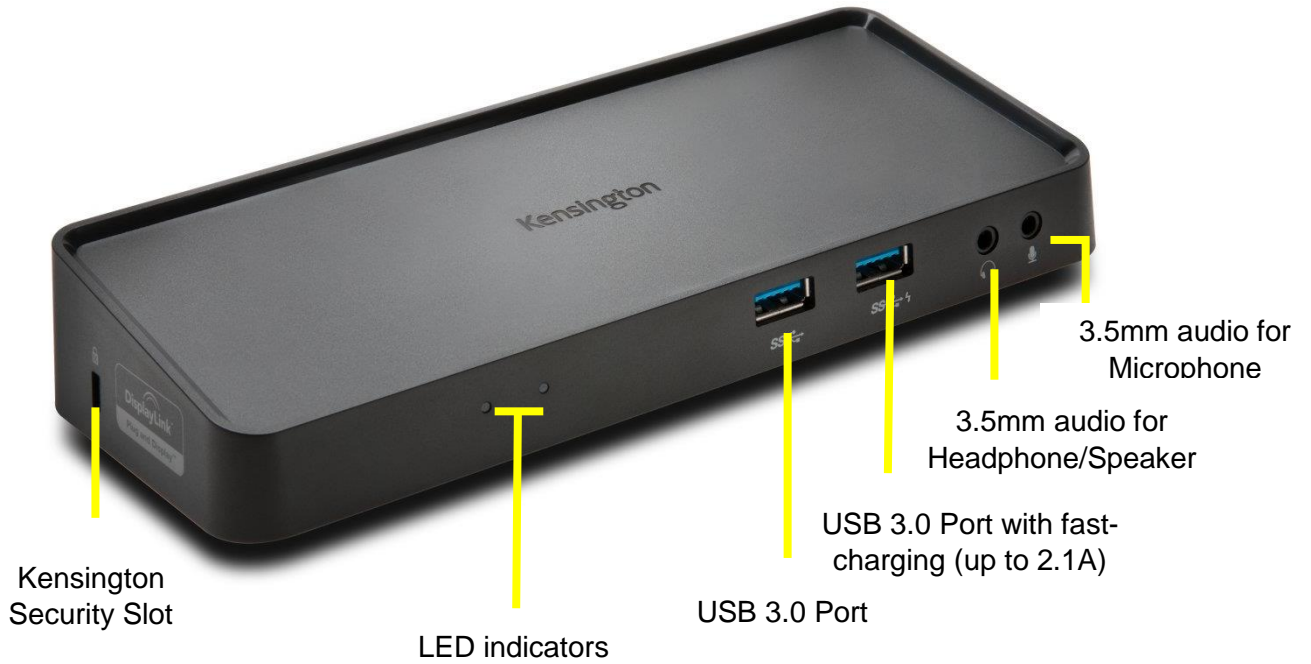

BACK

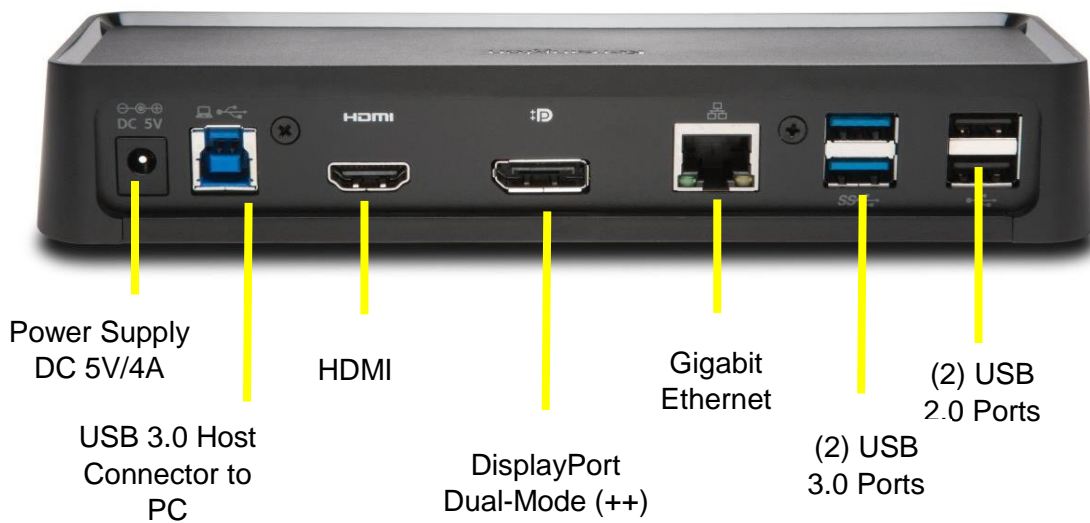

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

Technical Specifications

SYSTEM REQUIREMENT

- **Plug & Play:** No, software installation required. Download the driver at software.kensington.com
- **Operating Systems Supported:** Windows 7, 8, 8.1, 10
- **System Resource Requirement:**
 - CPU: Dual-Core i3 2.8GHz or better
 - RAM: 2GB or higher

HOST CONNECTIVITY

- **Host Docking Connector:** USB 3.0 Type-B

VIDEO CONNECTIONS

- **Video Connectors:**
 - HDMI v1.3
 - DisplayPort v1.1 ++ (Passive cables/adapters for HDMI or DVI conversion)
- **Maximum Resolution Supported:**
 - Single Monitor: 2560 x 1600
 - Dual Monitors: 2048 x 1152
- **HDCP Support:** Yes

AUDIO CONNECTIONS

- **Audio Connectors:**
 - 3.5mm audio for headphone/speaker
 - 3.5mm audio for microphone
- **Audio Channels Supported:** up to 5.1

USB CONNECTIONS

- **USB 2.0 Ports:** 2, back panel, speed up to 480Mbps
- **USB 3.0 Ports:** 4, two each on front and back panel, speed up to 5Gbps
- **USB-C Ports:** N/A
- **Fast Charging:** On the right USB 3.0 port on the front panel, up to 2.1A

NETWORK CONNECTIONS

- **Ethernet Port:** RJ45
- **Compatible Ethernet Speeds:** 10/100/1000 Mbps

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

SECURITY AND MOUNTING

- **Kensington Security Slot:** Yes
- **VESA Mount Compatible:** Yes, VESA mounting plate (K33959WW) sold separately

PRODUCT DIMENSIONS

- **Unit Dimensions:**
 - Width: 198mm (7.8in)
 - Length: 80mm (3.1in)
 - Height: 34mm (1.3in)
- **Desktop Footprint:** 158 cm² (24 in²); zero if mounted behind VESA compatible monitor
- **Unit Weight:** TBD
- **Enclosure Color and Material:** Black ABS

PACKAGING DIMENSIONS

- **Packaging Style:** Brown Box
- **Packaging Dimensions:**
 - Width: 249mm (9.8in)
 - Length: 165mm (6.5in)
 - Height: 84mm (3.3in)
- **Packaging Weight:** 0.86kg (1.9lbs)
- **Master Carton:** 4 pcs
- **Package Content:**
 - One Kensington SD3650 Dock
 - One USB 3.0 A to B Cable, 1m (3ft)
 - One Power Adapter with changeable US/EU/UK/AU power prongs included
 - Quick Start Guide
 - Warranty Information

POWER & ENVIRONMENTAL

- **Power Adapter Rating:**
 - Input: 100-240V~50/60Hz; 0.8A
 - Output: 5V DC; 4A, positive center polarity
- **Operating Temperature:** 10 to 40⁰ C (50 to 104⁰ F)
- **Storage Temperature:** -10 to 80⁰ C (14 to 176⁰ F)
- **Relative Humidity:** 5% to 95% non-condensing

COUNTRY OF ORIGIN, REGULATORY, AND WARRANTY

- **Country of Origin:** China
- **Certifications and Compliance:** FCC, CE, C-Tick, REACH, WEEE, RoHS
- **Warranty:** 2-Years worldwide

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.