

SD4610P USB-C Universal Dock with Power

Part Number: K38350NA

UPC Code: 85896383505



Let the leader in professional desktop performance make your transition to driverless USB-C connectivity as smooth as possible with the SD4610P USB-C Universal Dock with Power Delivery. The dock works with Windows, Mac OS and Chrome OS devices, allowing you to plug in a single cable that delivers up to 4K video, charges your laptop and offers high-speed data transfer (up to 5Gbps). Plus, you get instant access to all your peripheral desktop accessories. Zero Footprint mounting makes it ideal for workstations with limited space (mount sold separately) and it's Thunderbolt™ 3 compatible.

FEATURES	BENEFITS
<ul style="list-style-type: none">• USB-C Connectivity with Power (up to 60W)• Supports Single 4K / Dual 1080p• Zero Footprint Mounting Option• Thunderbolt 3 Compatible• Kensington Security Slot• USB Expansion 3A/1C• Gigabit Ethernet Port• Plug and Play for Compatible Devices	<ul style="list-style-type: none">• Single Cable Connectivity<ul style="list-style-type: none">○ One cable connection from laptop to all peripherals on user's desk• Maximize Workspace Desk<ul style="list-style-type: none">○ Reduce desktop cable clutter by mounting the dock behind a VESA compatible monitor• More Display Productivity<ul style="list-style-type: none">○ Add up to two external monitors to increase work productivity

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

Technical Specifications

SYSTEM REQUIREMENT

- **Plug & Play:** Yes (macOS and Windows 7 require a one-time driver download)
- **Operating Systems Supported:** Chrome OS 44 or above, macOS 10.10 or above, Windows 7 or above
- **System Resource Requirement:** Host device must support Power Delivery and DisplayPort Alt mode over USB-C, as well as Multi-Stream Transport (MST) for multi-monitor support. Mac and Chrome do not support dual displays via MST today.

HOST CONNECTIVITY

- **Host Docking Connector:** USB-C with Power Delivery up to 60W

VIDEO CONNECTIONS

- **Video Connectors:**
 - DisplayPort v1.2
 - HDMI v2.0
- **Maximum Resolution Supported:**
 - Single Monitor: 4096 x 2160 @ 30Hz
 - Dual Monitors: 1920 x 1080 @ 60Hz
- **HDCP Support:** Yes

AUDIO CONNECTIONS

- **Audio Connectors:**
 - 3.5mm audio for headphone/speaker
 - 3.5mm audio for microphone
- **Audio Channels Supported:** Stereo LR

USB CONNECTIONS

- **USB 2.0 Ports:** N/A
- **USB 3.1 Gen 1 Ports:** 3, (1) front & (2) back, speed up to 5Gbps
- **USB-C Ports:** (1) on the back panel; does not support USB-C Alt mode. Supports USB bus power up to 15W
- **Fast Charging:** Yes on front side USB-A port, up to 2.1A

NETWORK CONNECTIONS

- **Ethernet Port:** RJ45
- **Compatible Ethernet Speeds:** 10/100/1000 Mbps

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

SECURITY & MOUNTING

- **Kensington Security Slot:** Yes
- **VESA Mount Compatible:** Yes, VESA mounting plate (K33959WW) sold separately

PRODUCT DIMENSIONS

- **Unit Dimensions**
 - **Width:** 217mm (8.5in)
 - **Length:** 95mm (3.7in)
 - **Height:** 26mm (1.0in)
- **Desktop Footprint:** 206 cm² (24 in²); zero if mounted behind VESA compatible monitor
- **Unit Weight:** 296g (10.4 oz)
- **Enclosure Color and Material:** Black ABS

PACKAGING DIMENSIONS

- **Packaging Style:** White Box (WW) & Retail Box (AU)
- **Packaging Dimensions:**
 - **Width:** 254mm (10in)
 - **Length:** 140mm (5.5in)
 - **Height:** 89mm (3.5in)
- **Packaging Weight:** 950g (2.1 lbs)
- **Master Carton:** 4 pcs
- **Package Content:**
 - One Kensington SD4610P Dock
 - One USB-C cable with power, 0.5m (1.5ft)
 - (WW) One 90W power adapter with US/EU/UK power cables included
 - (AU) One 90W power adapter with AU power cable included
 - Quick Start Guide
 - Warranty Information

POWER & ENVIRONMENTAL

- **Power Adapter Rating:**
 - **Input:** 100-240V~50/60Hz; 1.5A max
 - **Output:** 20V DC; 4.5A, center-pin positive polarity
- **Operating Temperature:** 5 to 35° C (41 to 95° F)
- **Storage Temperature:** -40 to 70° C (-40 to 158 F°)
- **Relative Humidity:** 5% to 95% non-condensing

COUNTRY OF ORIGIN, REGULATORY, AND WARRANTY


- **Country of Origin:** China
- **Certifications and Compliance:** FCC, CE, RCM, ERP, REACH, WEEE, RoHS, HDMI ATC, VESA DisplayPort
- **Warranty:** 3-Years worldwide

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

FRONT



BACK

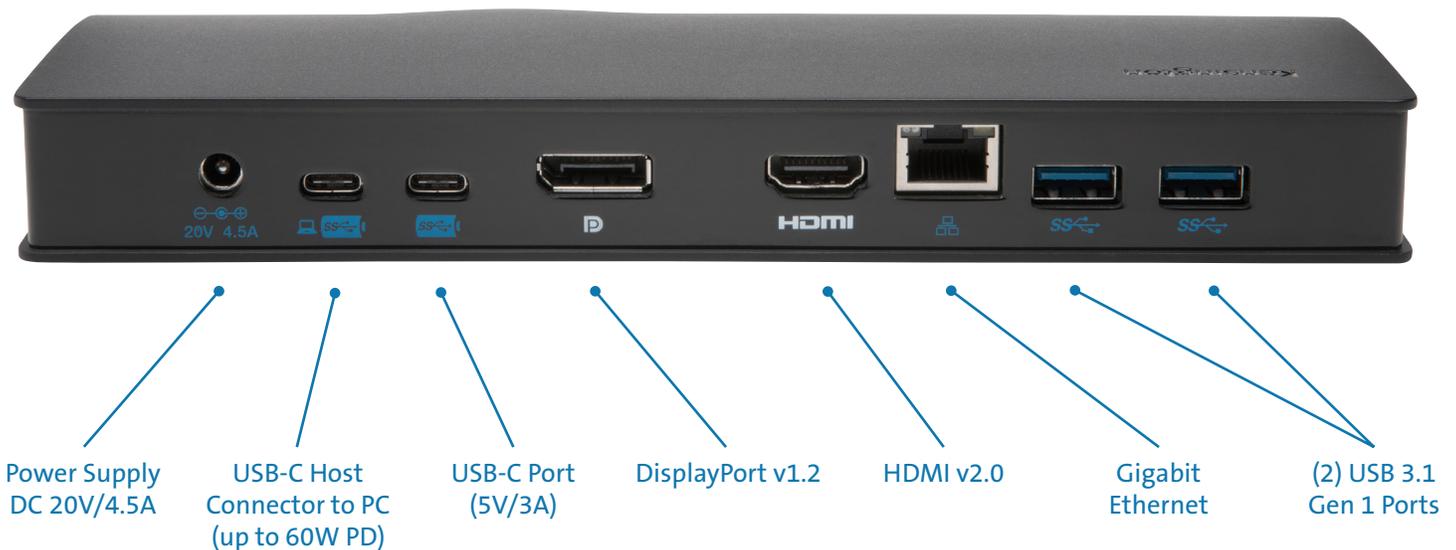

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.