

SD4600P USB-C Universal Dock with Power

Part Number: K38231

UPC Code: 85896382317




Let the SD4600P USB-C Universal Dock with Power Delivery make your transition to USB-C connectivity as smooth as possible. The dock works with Windows, Mac and Chrome OS devices, allowing you to plug in a single cable that delivers 4K video, charges your laptop and offers high-speed data transfer. Plus, you get instant access to all your peripheral desktop accessories. Zero Footprint mounting makes it ideal for workstations with limited space (mount sold separately) and it's Thunderbolt™ 3 compatible to accommodate devices featuring the Intel® technology.


FEATURES	BENEFITS
<ul style="list-style-type: none"> • USB-C Connectivity with Power (up to 60W) • Supports Up to Two 4K Monitors • Zero Footprint Mounting Option • Thunderbolt 3 Compatible • Kensington Security Slot • USB Expansion 3A/1C • Gigabit Ethernet Port • Plug and Play for Compatible Devices 	<ul style="list-style-type: none"> • Single Cable Connectivity <ul style="list-style-type: none"> ○ One cable connection from laptop to all peripherals on user's desk • Maximize Workspace Desk <ul style="list-style-type: none"> ○ Reduce desktop cable clutter by mounting the dock behind a VESA compatible monitor • More Display Productivity <ul style="list-style-type: none"> ○ Add up to two external monitors to increase work productivity

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

FRONT

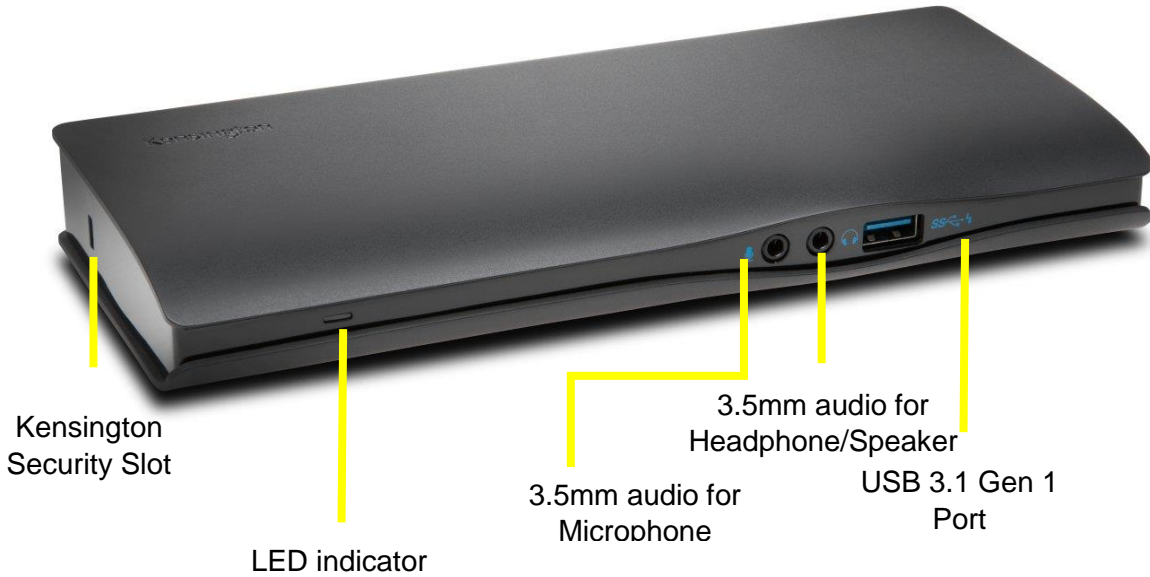

BACK

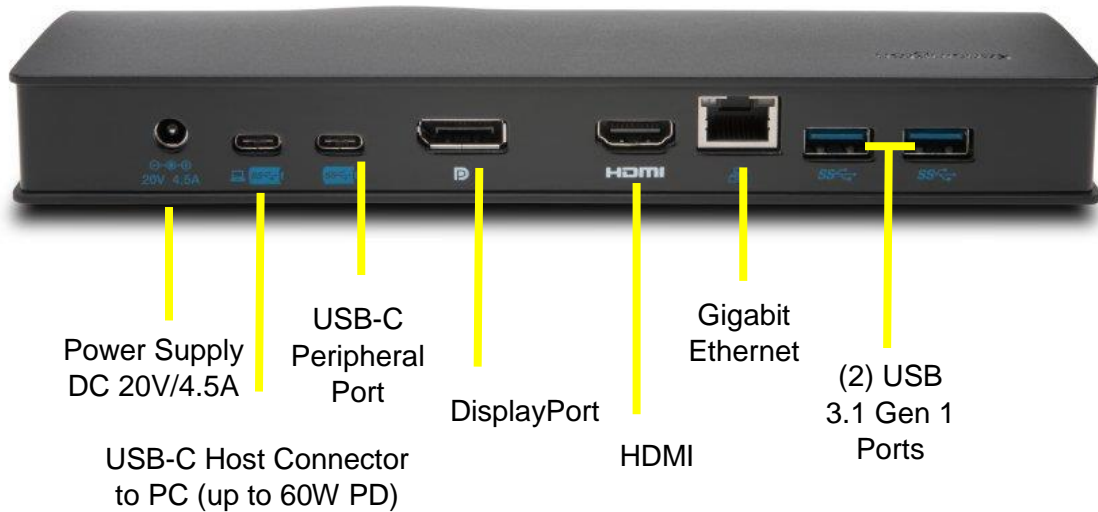

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

Technical Specifications

SYSTEM REQUIREMENT

- **Plug & Play:** Yes for Windows and Chrome OS. Ethernet driver needed for Mac
- **Operating Systems Supported:** Windows 8.1 & 10, Mac OS 10.10.5 or above, Chrome OS
- **System Resource Requirement:** N/A

HOST CONNECTIVITY

- **Host Docking Connector:** USB-C with Power Delivery up to 60W

VIDEO CONNECTIONS

- **Video Connectors:**
 - DisplayPort v1.2
 - HDMI v2.0
- **Maximum Resolution Supported:**
 - Single Monitor: 4096 x 2160 @ 60Hz
 - Dual Monitors: 4096 x 2160 @ 30Hz
- **HDCP Support:** Yes

AUDIO CONNECTIONS

- **Audio Connectors:**
 - 3.5mm audio for headphone/speaker
 - 3.5mm audio for microphone
- **Audio Channels Supported:** Stereo LR

USB CONNECTIONS

- **USB 2.0 Ports:** N/A
- **USB 3.1 Gen 1 Ports:** 3, (1) front & (2) back, speed up to 5Gbps
- **USB-C Ports:** (1) on the back panel; does not support USB-C Alt mode. Supports USB bus power up to 15W
- **Fast Charging:** Yes on front side USB-A port, up to 2.1A

NETWORK CONNECTIONS

- **Ethernet Port:** RJ45
- **Compatible Ethernet Speeds:** 10/100/1000 Mbps

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

SECURITY AND MOUNTING

- **Kensington Security Slot:** Yes
- **VESA Mount Compatible:** Yes, VESA mounting plate (K33959WW) sold separately

PRODUCT DIMENSIONS

- **Unit Dimensions:**
 - Width: 217mm (8.5in)
 - Length: 95mm (3.7in)
 - Height: 26mm (1.0in)
- **Desktop Footprint:** 206 cm² (24 in²); zero if mounted behind VESA compatible monitor
- **Unit Weight:** 296g (10.4 oz)
- **Enclosure Color and Material:** Black ABS

PACKAGING DIMENSIONS

- **Packaging Style:** White Box (WW) & Retail Box (AU)
- **Packaging Dimensions:**
 - Width: 254mm (10in)
 - Length: 140mm (5.5in)
 - Height: 89mm (3.5in)
- **Packaging Weight:** 950g (2.1 lbs)
- **Master Carton:** 4 pcs
- **Package Content:**
 - One Kensington SD4600P Dock
 - One USB-C cable with power, 0.5m (1.5ft)
 - (WW) One 90W power adapter with US/EU/UK power cables included
 - (AU) One 90W power adapter with AU power cable included
 - Quick Start Guide
 - Warranty Information

POWER & ENVIRONMENTAL

- **Power Adapter Rating:**
 - Input: 100-240V~50/60Hz; 1.5A max
 - Output: 20V DC; 4.5A, center-pin positive polarity
- **Operating Temperature:** 5 to 35^o C (41 to 95^o F)
- **Storage Temperature:** -40 to 70^o C (-40 to 158^o F)
- **Relative Humidity:** 5% to 95% non-condensing

COUNTRY OF ORIGIN, REGULATORY, AND WARRANTY

- **Country of Origin:** China
- **Certifications and Compliance:** FCC, CE, RCM, ERP, REACH, WEEE, RoHS, HDMI ATC, VESA DisplayPort
- **Warranty:** 3-Years worldwide

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.